



5 Years warranty

Key Features


- ✓ IP42
- ✓ CRI >70 (80)
- ✓ DALI 2.0
- ✓ 0~10 V Dimming
- ✓ Optional Full Spectrum
- ✓ Color Temperature Selectable
- ✓ UGR <19

CCT Selectable, Power selectable, Less SKU



Polycarbonate or aluminium reflector is available

Decorative modern pendant suitable for commercial and retail applications

Dimensions(mm):

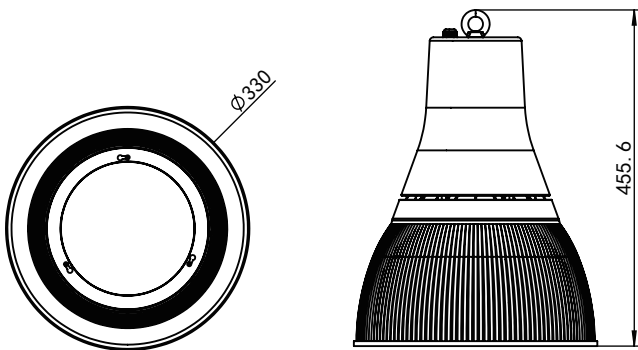

LIGHT DISTRIBUTION CURVE

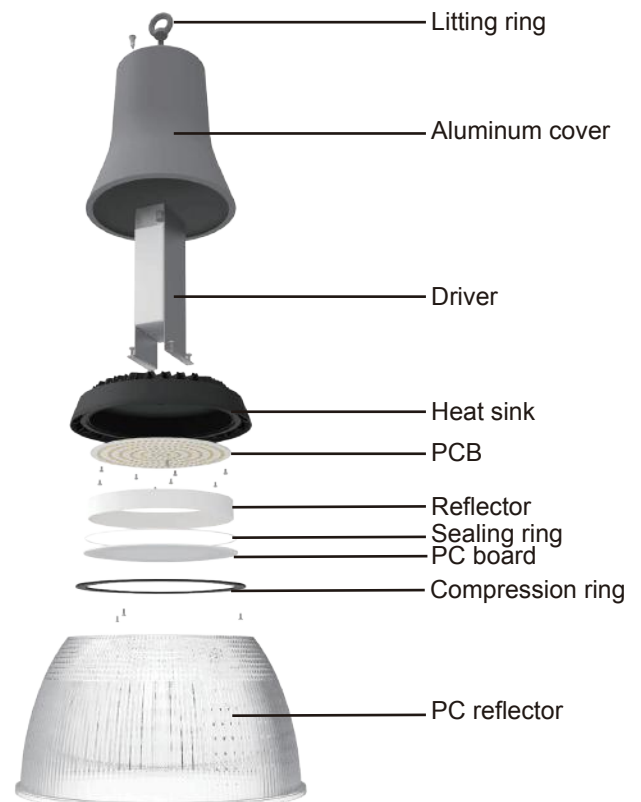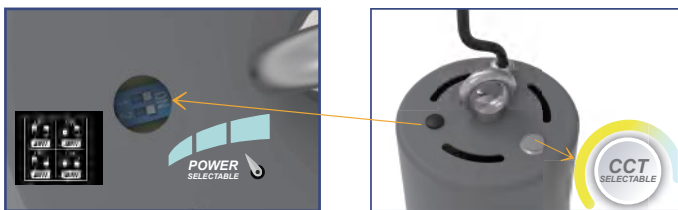

Power	Dimension(mm)	Input Voltage	Beam Angle	Efficiency	Insulation Grade	PF	CCT	Lifetime(Hrs)
80-60-40W	φ330x455mm	AC220-240V 50/60Hz	90°	130LM/W	Class I	>0.95	3000K/4000K/5000K	50,000

